


**Panasonic**

Cell Type BK-4HCDE

To PECE

**Specifications**

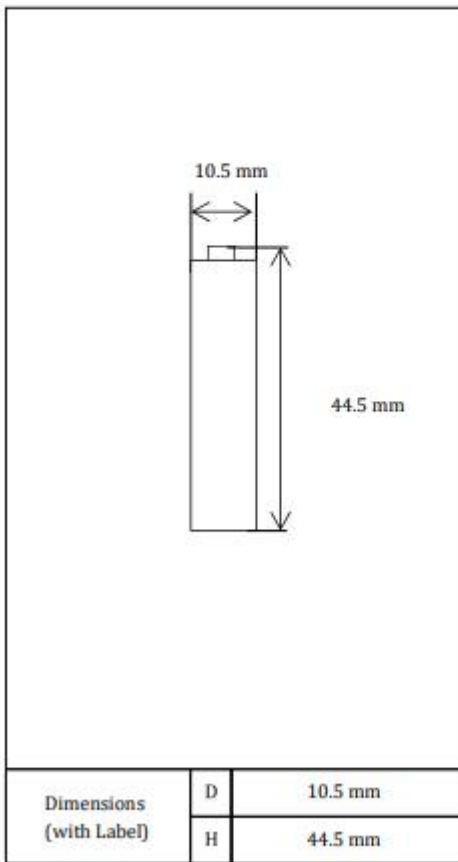


Type : Nickel-Metal Hydride Battery		Size : AAA Consumer Type	
Country of origin		Japan	
Capacity <sup>1)</sup>	Minimum	930mAh	
Nominal Voltage		1.2V	
Charging Current x Time	Fast Charge <sup>2)</sup>	Max.480mA	
Ambient Temp.	Charge Condition	Fast Charge <sup>2)</sup>	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 90days	-20°C - 40°C
Less than 1year		-20°C - 30°C	
Internal Impedance <sup>3)</sup> (after discharge to E.V.=1.0V)		Approx. 45m Ω (at 1000Hz)	
Weight <sup>4)</sup>		Approx. 13 g	
Size <sup>4)</sup> :(Diameter) x (Height)		10.5(D) x 44.5(H) mm	

- 1) Single cell capacity under the following condition.  
Charge: 93 mA x 16h, Discharge: 186 mA (E.V = 1.0V at 20deg. C)
- 2) Use recommended of charging system
- 3) After a few charge and discharge cycles under the above first condition.
- 4) With label



### Charge Characteristics

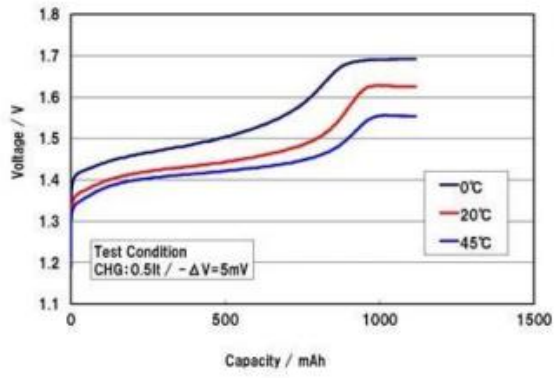

### Discharge Characteristics

